

- Integrated LED driver for easier installation, with 2-pin AS3112 power plug, no electrician work needed
- Tested and compatible with Clipsal triac (leading/universal/trailing) dimmer
- Long lifespan and maintenance free
- IP44 water proof rated for damp location application
- Replace 92mm cut size 60W incandescent Downlight
- >80% more efficient than incandescent downlight
- Lifetime of 30,000 hrs
- 3 years warranty



Order Code 64987

## General Data

Filter Design Frosted PMMA

## Geometric Data

Height (mm) 66.0mm (including LED driver)

Diameter (mm) 115mm

Cut-hole (mm) 92 (90-110)mm circular

Weight (g) 255g

## Electric Data

Wattage 10.5W

Voltage 200-240 V AC

Power Factor  $\geq 0.90$

## Photometric Data

Luminous Flux (lm) 850

CRI Typ.80

CCT 3000 K – Warm white

Luminous Intensity (cd) 350 Cd



Beam Angle (°) 100°

Switching cycles 100,000

Lifetime (L70) 30,000 hrs \*

**Replace** 60W incandescent Downlight

\* LED Chips' lumen maintenance period under indoor 25° C environment.

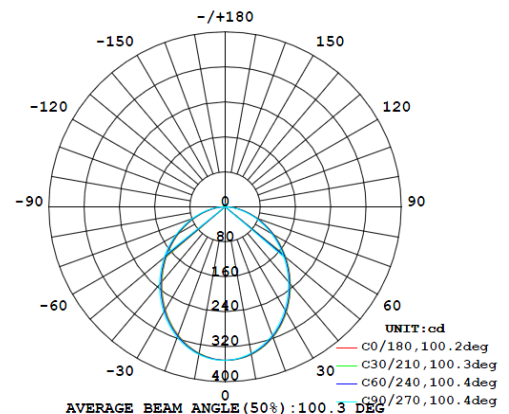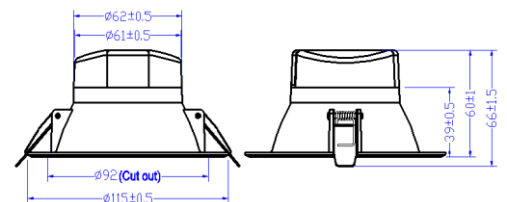



**Order Code** 64987

**Product Description** Verbatim LED recessed downlight 10.5W 3000K WW 220-240V 850LM DIMMABLE (92mm)

## Technical Packaging Details

Giftbox Barcode	6943760249873
Outer Carton Barcode	26943760249877
Inner Carton Barcode	16943760249870
Pack Dimensions (HxWxL)	138mmx128mmx92mm
Pack Weight	365g
Carton Qty (Shipping Unit)	20
Carton Dimensions (HxWxL)	716mmx277mmx220mm
Cartons/Layer	4
Layers/Pallet	4
Units/Pallet	320