

- Integrated Floodlight for metal halide lamp replacement
- Metal cabinet for better thermal management and longer lifespan
- IP65 water-proof
- IK07 impact proof
- 1.8-2.5 metre suggested installation height
- 7-10 metre sensor detection range (120° detection angle)
- No fixture activation during day time (background environment brightness > 30lux)
- 60 seconds fixture activation on each motion detected
- Lifetime of 15,000 hrs



Order Code 65640

General Data

Lamp Socket	Integrated Fixture
Design	PC diffuser with motion sensor

Geometric Data



Length (mm)	220mm
Width (mm)	167mm
Weight (g)	820g

Electric Data

Wattage	30 W
Voltage	220-240 V AC
Power Factor	≥0.9
Operating Frequency	50/60 Hz

Photometric Data

Luminous Flux (lm)	2400
CRI	≥80
CCT	5000 K – daylight
Luminous Intensity (cd)	1050Cd
Beam Angle (°)	100°
Lifetime	15,000 hrs

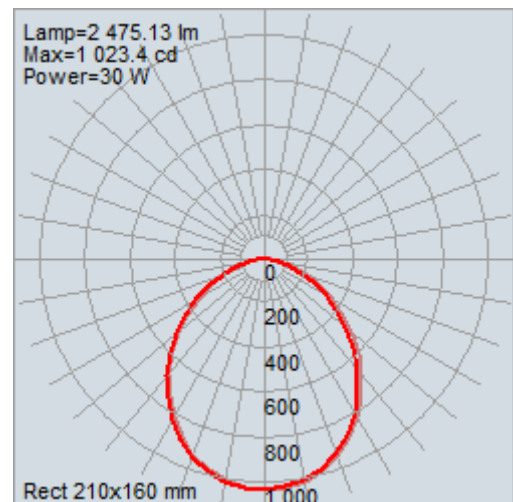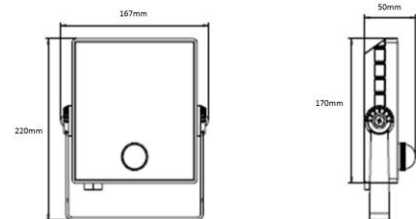



Order Code	65640
Product Description	Verbatim Sensor LED Floodlight 30W 2400lm 5000K Daylight 220-240V with Australia plug

Technical Packaging Details

Giftbox Barcode	6943760256406
Inner Carton Barcode	16943760256403
Outer Carton Barcode	26943760256400
Pack Dimensions (LxWxH)	226mm x 171mm x 56mm
Pack Weight	900g
Carton Qty (Shipping Unit)	12
Carton Dimensions (LxWxH)	360mm x 353mm x 283mm
Cartons/Layer	6
Layers/Pallet	3
Units/Pallet	216