

- IP54 rated, suitable for damp location installation
- Slim design, only 40mm thick
- Easy Installation
- Triac-Dimmable, compatible with Clipsal dimmers
- Long lifespan and little maintenances required
- Replace 30W circular type fluorescent tube
- Suitable for both business, commercial & residential installation
- Lifetime of 40,000 hrs



Order Code 65441

#### General Data

Filter Design Frosted PMMA

#### Geometric Data

Thickness (mm) 40mm

Diameter (mm) 300mm

Weight (g) 900g

#### Electric Data

Wattage 18W

Voltage 200-240 V AC

Current 90mA (primary @ 230V Input)

Power Factor  $\geq 0.90$

Operating Frequency 50/60 Hz

#### Photometric Data

Luminous Flux (lm) 1650

CRI Typ.80


CCT 4000 K – cool white

Luminous Intensity (cd) 550


Beam Angle (°) 120°

Lifetime (L70) 40,000 hrs

**Replace** 30W Circular type fluorescent tube

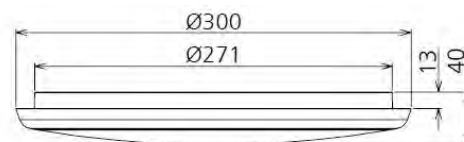

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

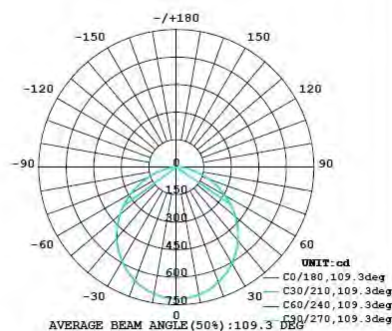



## Order Code

65441

## Product Description

Verbatim Slim LED Ceiling Light 18W 300MM 4000K  
1650LM Dimmable

## Technical Packaging Details

|                            |                   |
|----------------------------|-------------------|
| Giftbox Barcode            | 6943760254419     |
| Inner Carton Barcode       | 16943760254416    |
| Outer Carton Barcode       | 26943760254413    |
| Pack Dimensions (HxWxL)    | 310mmx310mmx50mm  |
| Pack Weight                | 1100g             |
| Carton Qty (Shipping Unit) | 10                |
| Carton Dimensions (HxWxL)  | 530mmx325mmx335mm |
| Cartons/Layer              | TBC               |
| Layers/Pallet              | TBC               |
| Units/Pallet               | TBC               |