



- 3-CCT (3000K/4000K/5700K) selectable
- 30W, 2760-3000lm
- Triac dimmable
- Slim design
- IP54 water proof for wet location installation
- 120° beam angle
- Lifetime 40,000 hrs

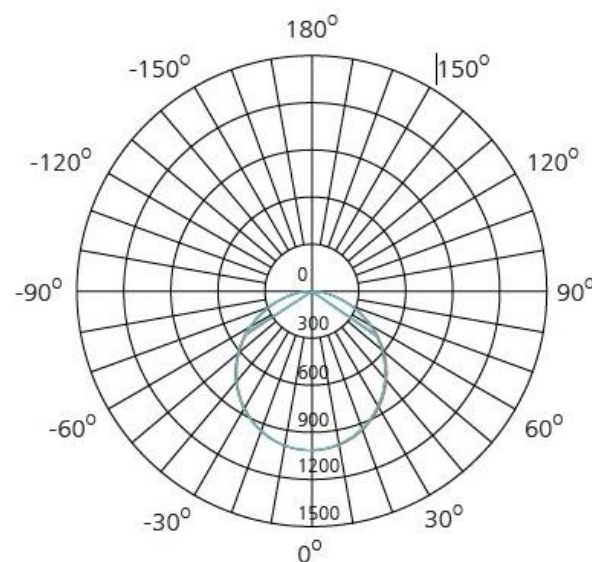

Order Code	65933
General Data	
Lamp Socket	Integrated downlight
Design	PC diffuser
Geometric Data	
Height (mm)	52mm
Diameter (mm)	400mm
Cut-hole (mm)	N/A
Weight (g)	1400g
Electric Data	
Wattage	30W
Voltage	220-240 V AC
Power Factor	≥0.9
Operating Frequency	50/60 Hz
Photometric Data	
Total Luminous Flux (lm)	2760-3000lm
90° cone Luminous Flux (lm)	N/A
CRI	≥80
CCT	3000K/4000K/5700K
Luminous Intensity (cd)	1100Cd (measured at 4000K)
Beam Angle (°)	120°
Lifetime	40,000 hrs
Equivalent to (W)	

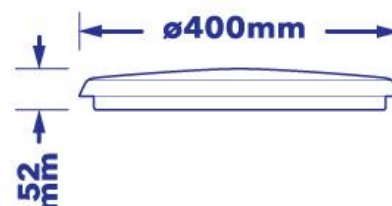

AVERAGE BEAM ANGLE (50%): 112.4DEG



Order Code 65933

Product Description Verbatim IP54 Slim LED ceiling light 30W 400mm
3-CCT selectable 2760-3000lm dimmable

Technical Packaging Details

Giftbox Barcode	6943760259339
Inner Carton Barcode	16943760259336
Outer Carton Barcode	26943760259333
Pack Dimensions (LxWxH)	410 mm x 410 mm x 60 mm
Pack Weight	1900g
Carton Qty (Shipping Unit)	10
Carton Dimensions (LxWxH)	880mm x 480mm x330mm
Cartons/Layer	TBC
Layers/Pallet	TBC
Units/Pallet	TBC