

- IP54 rated, suitable for damp location installation
- Slim design, only 48mm thick
- Easy Installation
- Triac-Dimmable, compatible with Clipsal dimmers
- Long lifespan and little maintenances required
- Replace 20W circular type fluorescent tube
- Suitable for both business, commercial & residential installation
- Lifetime of 40,000 hrs



Order Code 65440

General Data

Filter Design Frosted PMMA

Geometric Data

Thickness (mm) 48mm

Diameter (mm) 250mm

Weight (g) 610g

Electric Data

Wattage 12W

Voltage 200-240 V AC

Current 70mA (primary @ 230V Input)

Power Factor ≥ 0.90

Operating Frequency 50/60 Hz

Photometric Data

Luminous Flux (lm) 1100

CRI Typ.80



CCT 4000 K – cool white

Luminous Intensity (cd) 360


Beam Angle (°) 120°

Lifetime (L70) 40,000 hrs

Replace 20W Circular type fluorescent tube



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

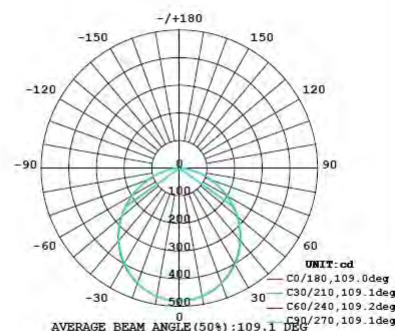



Order Code 65440

Product Description Verbatim Slim LED Ceiling Light 12W 250MM 4000K 1100LM Dimmable

Technical Packaging Details

Giftbox Barcode	6943760254402
Inner Carton Barcode	16943760254409
Outer Carton Barcode	26943760254406
Pack Dimensions (HxWxL)	260mmx260mmx57mm
Pack Weight	800g
Carton Qty (Shipping Unit)	20
Carton Dimensions (HxWxL)	600mmx535mmx285mm
Cartons/Layer	TBC
Layers/Pallet	TBC
Units/Pallet	TBC