

- 3-CCT (3000K/4000K/5700K) selectable
- Switch on the back to select CCT
- 10W, 700-900lm
- Equipped with 2-pin Australia AS3112 plug, ready to plug-in
- Triac dimmable
- IC-4 insulation rated, can be covered by insulating material during insulation
- 90° beam angle
- Lifetime 40,000 hrs



Order Code 66324

## General Data

Lamp Socket Integrated downlight  
Design Deep Recessed diffuser

## Geometric Data

Height (mm) 83.4mm (including LED driver)  
Diameter (mm) 115mm  
Weight (g) TBC


## Electric Data

Wattage 10W  
Voltage 220-240 V AC  
Power Factor  $\geq 0.9$   
Operating Frequency 50/60 Hz


## Photometric Data


Total Luminous Flux (lm) 700-900lm  
90° cone Luminous Flux (lm) N/A  
CRI  $\geq 80$   
CCT 3000K/4000K/5700K  
Luminous Intensity (cd) TBC (measured at 4000K)  
Beam Angle (°) 90°  
Lifetime 40,000 hrs

## Equivalent to (W)

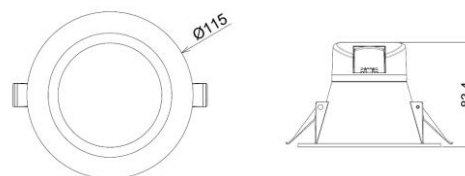

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

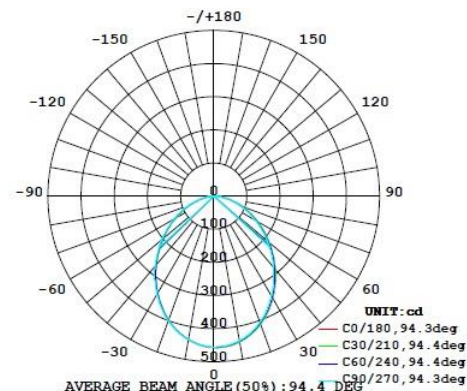

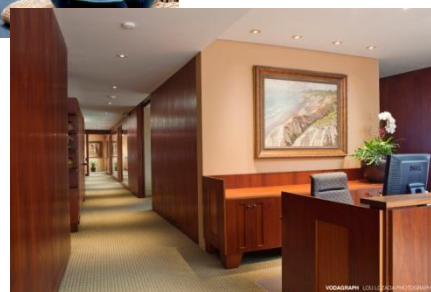

## Order Code

66324

## Product Description

Verbatim LED recessed downlight (deep recessed diffuser) 10W  
CCT selectable 700-900lm with AU plug (90/115mm)

## Technical Packaging Details

Giftbox Barcode	6943760263244
Inner Carton Barcode	N/A
Outer Carton Barcode	26943760263248
Pack Dimensions (LxWxH)	125 mm x 125 mm x 93 mm
Pack Weight	TBC
Carton Qty (Shipping Unit)	30
Carton Dimensions (LxWxH)	390 mm x 265 mm x 490 mm
Cartons/Layer	12
Layers/Pallet	2
Units/Pallet	720