

- Replacement for low voltage 42 W halogen lamp
- High lumen output : 510lm
- Lifetime of 20,000 hrs
- Ideal for accent lighting in hotels, hospitals, shops, restaurants or museums
- 36° beam angle
- Switching cycle 100,000 times
- 86% Energy Saving
- Non-dimmable



Order Code 65267

General Data

Lamp Socket GU5.3
Design Lens

Geometric Data

Length (mm) 48.5
Diameter (mm) 50.0
Weight (g) 38



Electric Data

Wattage 6W
Voltage 12 V AC/DC
Power Factor ≥ 0.50
Operating Frequency 50/60 Hz


Photometric Data

Luminous Flux (lm) 510
90° cone lumen (lm) 485
CRI ≥ 80
CCT 4000 K – cool white
Luminous Intensity (cd) 1000
Beam Angle (°) 36°
Lifetime 20,000 hrs

Equivalent to (W) 42 W



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

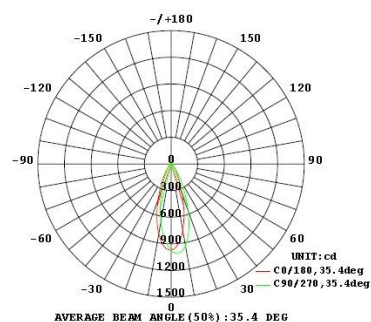



Order Code	65267
Product Description	LED MR16 GU5.3 6W 36deg 12V AC/DC 4000K CW

Technical Packaging Details

Giftbox Barcode	6943760252675
Outer Carton Barcode	16943760252672
Inner Carton Barcode	26943760252679
Pack Dimensions (HxWxL)	69 mm x 51 mm x 51 mm
Pack Weight	57g
Carton Qty (Shipping Unit)	10
Carton Dimensions (HxWxL)	80 mm x 115 mm x 270 mm
Cartons/Layer	24
Layers/Pallet	10
Units/Pallet	2400