



- 3-CCT (3000K/4000K/5700K) selectable
- 18W, 1750-1950lm
- Triac dimmable
- Slim design
- IP54 water proof for wet location installation
- 120° beam angle
- Lifetime 40,000 hrs



Order Code	65810
General Data	
Lamp Socket	Integrated downlight
Design	PC diffuser
Geometric Data	
Height (mm)	40mm
Diameter (mm)	300mm
Cut-hole (mm)	N/A
Weight (g)	1050g
Electric Data	
Wattage	18W
Voltage	220-240 V AC
Power Factor	≥0.9
Operating Frequency	50/60 Hz
Photometric Data	
Total Luminous Flux (lm)	1750-1950lm
90° cone Luminous Flux (lm)	N/A
CRI	≥80
CCT	3000K/4000K/5700K
Luminous Intensity (cd)	700Cd (measured at 4000K)
Beam Angle (°)	120°
Lifetime	40,000 hrs
Equivalent to (W)	

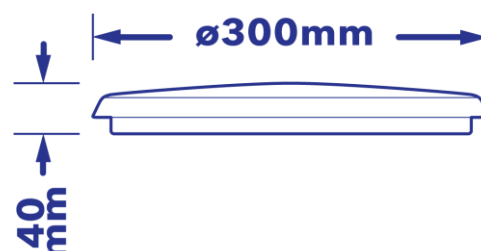

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

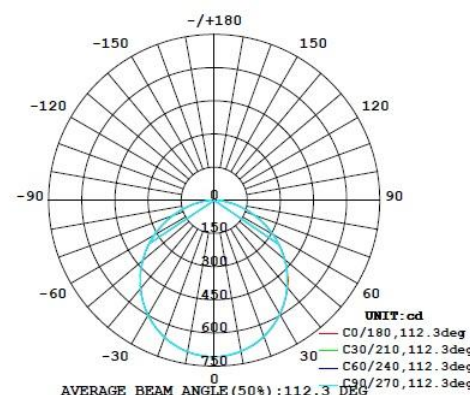



Order Code	65810
Product Description	Verbatim IP54 Slim LED ceiling light 18W 300mm 3-CCT selectable 1750-1950lm dimmable

Technical Packaging Details

Giftbox Barcode	6943760258103
Inner Carton Barcode	16943760258100
Outer Carton Barcode	26943760258107
Pack Dimensions (LxWxH)	310 mm x 310 mm x 50 mm
Pack Weight	1500g
Carton Qty (Shipping Unit)	10
Carton Dimensions (LxWxH)	530mm x 320mm x335mm
Cartons/Layer	2
Layers/Pallet	4
Units/Pallet	80