

- Integrated Floodlight for metal halide lamp replacement
- Metal cabinet for better thermal management and longer lifespan
- IP65 water-proof
- IK07 impact proof
- 1.8-2.5 metre suggested installation height
- 7-10 metre sensor detection range (120° detection angle)
- No fixture activation during day time (background environment brightness > 30lux)
- 60 seconds fixture activation on each motion detected
- Lifetime of 15,000 hrs



Order Code 65641

General Data

Lamp Socket	Integrated Fixture
Design	PC diffuser with motion sensor

Geometric Data



Length (mm)	301mm
Width (mm)	222mm
Weight (g)	1180g

Electric Data

Wattage	50 W
Voltage	220-240 V AC
Power Factor	≥0.9
Operating Frequency	50/60 Hz

Photometric Data

Luminous Flux (lm)	3850
CRI	≥80
CCT	5000 K – daylight
Luminous Intensity (cd)	1600Cd
Beam Angle (°)	100°
Lifetime	15,000 hrs

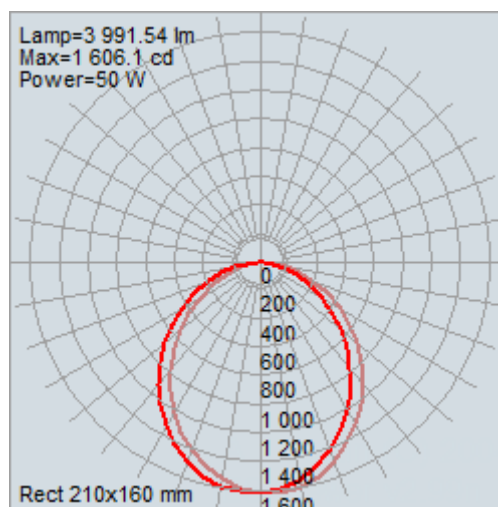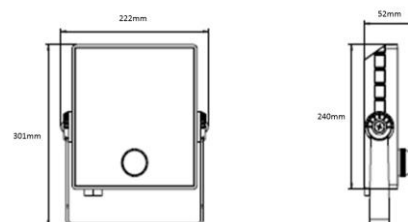



Order Code 65641

Product Description Verbatim Sensor LED Floodlight 50W 3850lm
5000K Daylight 220-240V with Australia plug

Technical Packaging Details

Giftbox Barcode	6943760256413
Inner Carton Barcode	16943760256410
Outer Carton Barcode	26943760256417
Pack Dimensions (LxWxH)	311mm x 232mm x 58mm
Pack Weight	1400g
Carton Qty (Shipping Unit)	6
Carton Dimensions (LxWxH)	365mm x 236mm x 318mm
Cartons/Layer	12
Layers/Pallet	2
Units/Pallet	144