

- Replace 400W metal halide type highbay
- Long lifespan, >50000hr
- 200W
- 150lm/W
- 220 to 240V input
- 110° beam angle
- Separate chamber for LED driver for better dissipation
- 0-10V dimming
- IP65 water proof



Order Code 65943

Geometric Data

Length (mm) 233.6mm (219mm for ring type mounting)

Diameter (mm) 379.3mm

Weight (g) 6.2kg

Electric Data

Wattage 200 W

Voltage 220-240 V AC

Power Factor ≥ 0.9

Operating Frequency 50/60 Hz

Photometric Data

Luminous Flux (lm) 30000

CRI ≥ 80


CCT 5000 K – Daylight

Luminous Intensity (cd) 10500Cd


Beam Angle (°) 110°



Lifetime 50,000 hrs

Equivalent to (W)

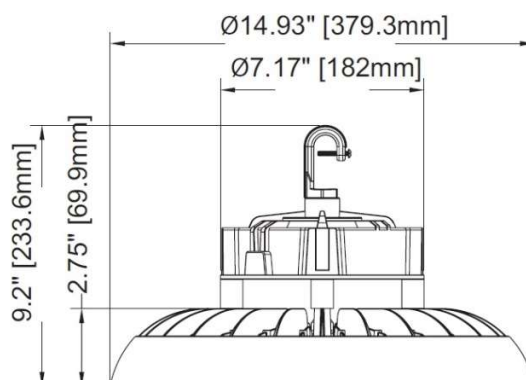

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

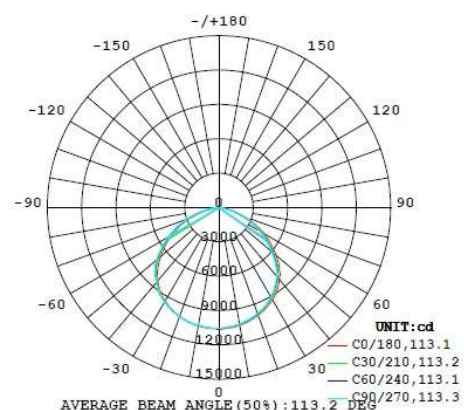

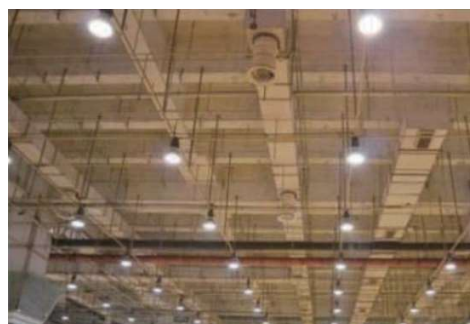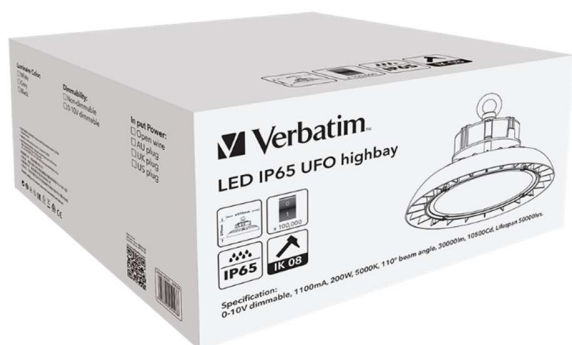

Order Code

65943

Product Description

Verbatim LED UFO highbay IP65
200W 5000K Daylight 30000lm 0-10V dimming

Technical Packaging Details

Giftbox Barcode	6943760259438
Inner Carton Barcode	16943760259435
Outer Carton Barcode	26943760259432
Pack Dimensions (LxWxH)	450mm x 450mm x 230mm
Pack Weight	7.3kg
Carton Qty (Shipping Unit)	1
Carton Dimensions (LxWxH)	450mm x 450mm x 230mm
Cartons/Layer	
Layers/Pallet	
Units/Pallet	